


AJFRXUCNP

Base Product

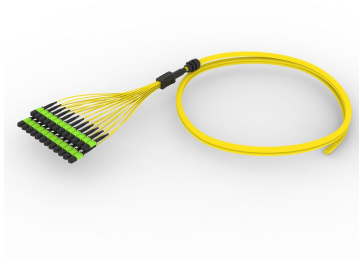

Ultra Low Loss Method A Singlemode MPO16 Pinned to Unconnectorized Pre-terminated Trunk Cable, 288-Fiber, Low Smoke Zero Halogen/Riser, 200µm 16F Rollable Ribbon

Product Classification

Regional Availability	Asia Australia/New Zealand Europe Latin America Middle East /Africa North America
Portfolio	CommScope®
Product Type	Fiber trunk cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications


Color, boot A	Black
Color, connector A	Green
Construction Type	Rollable ribbon
Furcation Color	Yellow
Interface, Connector A	MPO-16/APC Male
Interface, Connector B	Unterminated
Jacket Color	Yellow
Polarity	Method A
Fibers per Subunit, quantity	12
Total Fibers, quantity	288

Dimensions

Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

AJFRXUCNP

Ordering Tree

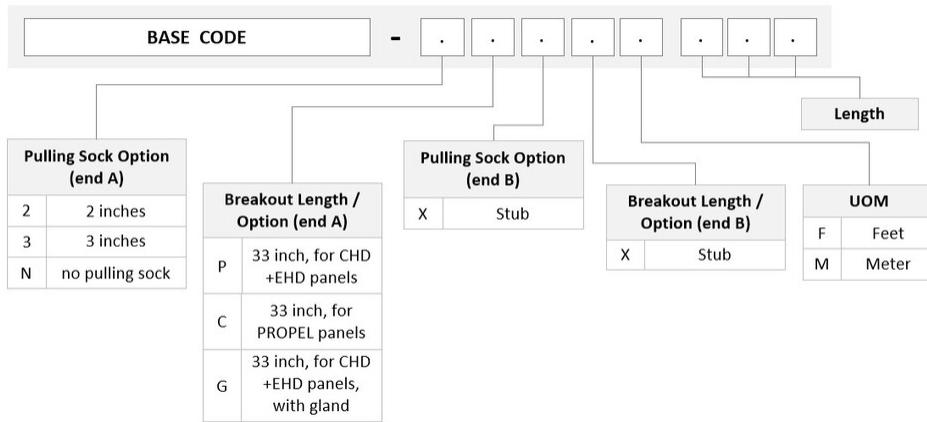

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.657.A2, TeraSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Dual Rated LSZH/Riser

Regulatory Compliance/Certifications


Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



Included Products

AJFRXUCNP

- 760259253
N-288-CN-RR-F16YL/8G1/99P
/200/C – Fiber indoor cable, All-Dielectric, LSZH/Riser-Rated, Gel-Free, Central Tube 200µm Rollable Ribbon, 288 fiber, Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color, Cca flame rating
- 860661398 – Fiber Optic Connector Kit, singlemode, OS2, MPO-16/APC, ULL, pinned, green, for 3 mm cable



Fiber indoor cable, All-Dielectric, LSZH/Riser-Rated, Gel-Free, Central Tube 200µm Rollable Ribbon, 288 fiber, Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color, Cca flame rating

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-CN


General Specifications

Cable Type	Ribbon central tube
Construction Type	Non-armored
Subunit Type	Gel-free
Fibers per Ribbon, quantity	16
Jacket Color	Yellow
Jacket Marking	Feet
Total Fiber Count	288

Dimensions

Buffer Tube/Subunit Diameter	6.5 mm 0.256 in
Diameter Over Jacket	10.9 mm 0.429 in

Representative Image

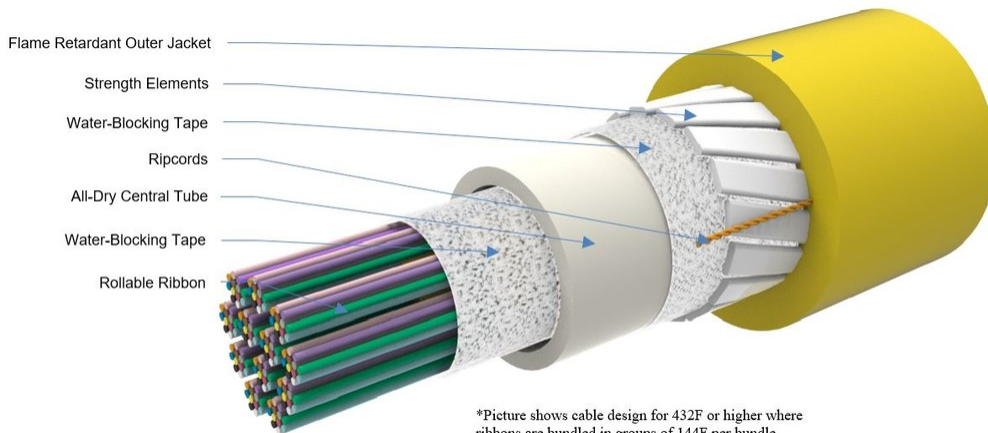

*Picture shows cable design for 432F or higher where ribbons are bundled in groups of 144F per bundle.
*144F & 288F count designs use water blocking threads rather than a water blocking tape inside the buffer tube.

Mechanical Specifications

Minimum Bend Radius, loaded	109 mm 4.291 in
Minimum Bend Radius, storage coils	218 mm 8.583 in
Minimum Bend Radius, unloaded	55 mm 2.165 in
Tensile Load, long term, maximum	800 N 179.847 lbf
Tensile Load, short term, maximum	2700 N 606.984 lbf
Compression	10 N/mm 57.101 lb/in
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	2.94 N-m 26.021 in lb
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7

Optical Specifications

Fiber Type	G.657.A2/B2 G.657.A2/B2
-------------------	---------------------------

Environmental Specifications

760259253 | N-288-CN-RR-F16YL/8G1/99P/200 /C

Installation temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-104-696 EN 187105 Telcordia GR-409
EN50575 CPR Cable EuroClass Fire Performance	Cca
EN50575 CPR Cable EuroClass Smoke Rating	s1a
EN50575 CPR Cable EuroClass Droplets Rating	d1
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Low Smoke Zero Halogen (LSZH) Riser
Flame Test Listing	NEC OFNR-ST1 (ETL) and c(ETL)
Flame Test Method	CSA FT4 IEC 60332-1-2 IEC 60754-2 IEC 61034-2 UL 1666 UL 1685

Environmental Test Specifications

Low High Bend	-20 °C to +60 °C (-4 °F to +140 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Packaging and Weights

Cable weight	95 kg/km 63.837 lb/kft
---------------------	--------------------------

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

860661398



Fiber Optic Connector Kit, singlemode, OS2, MPO-16/APC, ULL, pinned, green, for 3 mm cable

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber connector

General Specifications

Color	Green
Color, boot	Black
Ferrule Geometry	Angled
Interface	MPO/APC Male
Interface Feature	Pinned

Dimensions

Compatible Cable Diameter	3 mm 0.118 in
----------------------------------	-----------------

Optical Specifications

Fiber Mode	Singlemode
Fiber Type	OS2
Insertion Loss, maximum	0.35 dB
Return Loss, minimum	65 dB

Packaging and Weights

Packaging quantity	1
---------------------------	---

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

860661398

REACH-SVHC

Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS

Compliant

UK-ROHS

Compliant

