

P-001-SP-5M-F25

Fiber indoor cable, LazrSPEED® 2.5 mm Plenum Simplex, Multimode OM2+, Feet jacket marking

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand Latin America Middle East/Africa North America |
| Portfolio | CommScope® |
| Product Type | Fiber indoor cable |
| Product Series | P-SP |


General Specifications

| | |
|-----------------------------|-------------|
| Cable Type | Cordage |
| Construction Type | Non-armored |
| Fiber Type, quantity | 1 |
| Jacket Marking | Feet |
| Subunit Type | Gel-free |
| Total Fiber Count | 1 |

Dimensions

| | |
|-----------------------------|-------------------|
| Diameter Over Jacket | 2.5 mm 0.098 in |
|-----------------------------|-------------------|

Representative Image

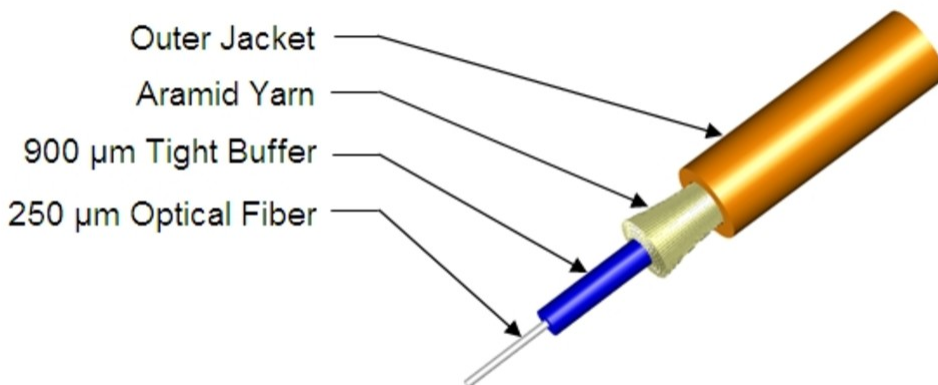

Mechanical Specifications

P-001-SP-5M-F25

| | |
|--|---------------------------------------|
| Minimum Bend Radius, loaded | 38 mm 1.496 in |
| Minimum Bend Radius, unloaded | 20 mm 0.787 in |
| Tensile Load, long term, maximum | 80 N 17.985 lbf |
| Tensile Load, short term, maximum | 267 N 60.024 lbf |
| Compression | 10 N/mm 57.101 lb/in |
| Compression Test Method | FOTP-41 IEC 60794-1 E3 |
| Flex | 300 cycles |
| Flex Test Method | FOTP-104 IEC 60794-1 E6 |
| Impact | 0.74 N-m 6.55 in lb |
| Impact Test Method | FOTP-25 IEC 60794-1 E4 |
| Strain | See long and short term tensile loads |
| Strain Test Method | FOTP-33 IEC 60794-1 E1 |
| Twist | 10 cycles |
| Twist Test Method | FOTP-85 IEC 60794-1 E7 |
| Vertical Rise, maximum | 500 m 1,640.42 ft |

Optical Specifications

| | |
|-------------------|---|
| Fiber Type | OM2+, LazrSPEED® 150 OM2+, LazrSPEED® 150 |
|-------------------|---|

Environmental Specifications

| | |
|--------------------------------------|---------------------------------------|
| Installation temperature | 0 °C to +70 °C (+32 °F to +158 °F) |
| Operating Temperature | -20 °C to +70 °C (-4 °F to +158 °F) |
| Storage Temperature | -40 °C to +70 °C (-40 °F to +158 °F) |
| Cable Qualification Standards | ANSI/ICEA S-83-596 Telcordia GR-409 |
| Environmental Space | Plenum |
| Flame Test Listing | NEC OFNP (ETL) and c(ETL) |
| Flame Test Method | NFPA 262 |

Environmental Test Specifications

| | |
|----------------------------------|-------------------------------------|
| Heat Age | -20 °C to +85 °C (-4 °F to +185 °F) |
| Heat Age Test Method | IEC 60794-1 F9 |
| Low High Bend | -20 °C to +70 °C (-4 °F to +158 °F) |
| Low High Bend Test Method | FOTP-37 IEC 60794-1 E11 |

P-001-SP-5M-F25

Temperature Cycle -20 °C to +70 °C (-4 °F to +158 °F)

Temperature Cycle Test Method FOTP-3 | IEC 60794-1 F1

Packaging and Weights

Cable weight 7 kg/km | 4.704 lb/kft

Regulatory Compliance/Certifications

Agency

ISO 9001:2015

Classification

Designed, manufactured and/or distributed under this quality management system



Included Products

CS-5M-TB – LazrSPEED® 150 OM2+ Bend-Insensitive Multimode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

CS-5M-TB

LazrSPEED® 150 OM2+ Bend-Insensitive Multimode Fiber

LazrSPEED® 150

Product Classification

| | |
|---------------------|---------------|
| Portfolio | CommScope® |
| Product Type | Optical fiber |

General Specifications

| | |
|--|--|
| Cladding Diameter | 125 µm |
| Cladding Diameter Tolerance | ±0.8 µm |
| Cladding Non-Circularity, maximum | 1 % |
| Coating Diameter (Colored) | 254 µm |
| Coating Diameter (Uncolored) | 245 µm |
| Coating Diameter Tolerance (Colored) | ±7 µm |
| Coating Diameter Tolerance (Uncolored) | ±10 µm |
| Coating/Cladding Concentricity Error, maximum | 12 µm |
| Core Diameter | 50 µm |
| Core Diameter Tolerance | ±2.5 µm |
| Core/Clad Offset, maximum | 1.5 µm |
| Proof Test | 689.476 N/mm ² 100000 psi |
| Tight Buffer Diameter | 900 µm |
| Tight Buffer Diameter Tolerance | ±40 µm |

Mechanical Specifications

| | |
|---|---------------------------------------|
| Macrobending, 15 mm mandrel, 2 turns | 0.20 dB @ 850 nm 0.50 dB @ 1,300 nm |
| Macrobending, 30 mm mandrel, 2 turns | 0.10 dB @ 850 nm 0.30 dB @ 1,300 nm |
| Coating Strip Force, maximum | 8.9 N 2.001 lbf |
| Coating Strip Force, minimum | 1.3 N 0.292 lbf |

CS-5M-TB

Dynamic Fatigue Parameter, minimum 18

Optical Specifications

Numerical Aperture 0.2
Numerical Aperture Tolerance ± 0.015
Point Defects, maximum 0.15 dB
Zero Dispersion Slope, maximum 0.105 ps/[km-nm-nm]
Zero Dispersion Wavelength, maximum 1316 nm
Zero Dispersion Wavelength, minimum 1297 nm

Optical Specifications, Wavelength Specific

1 Gbps Ethernet Distance 600 m @ 1,300 nm | 800 m @ 850 nm
10 Gbps Ethernet Distance 150 m @ 850 nm
Attenuation, maximum 1.00 dB/km @ 1,300 nm | 3.00 dB/km @ 850 nm
Backscatter Coefficient -68.0 dB @ 850 nm | -75.7 dB @ 1,300 nm
Bandwidth, Laser, minimum 500 MHz-km @ 1,300 nm | 950 MHz-km @ 850 nm
Bandwidth, OFL, minimum 500 MHz-km @ 1,300 nm | 700 MHz-km @ 850 nm
Differential Mode Delay 0.70 ps/m @ 850 nm | 0.88 ps/m @ 1,300 nm
Index of Refraction 1.479 @ 1,300 nm | 1.483 @ 850 nm
Standards Compliance TIA-492AAAB (OM2+)

Environmental Specifications

Heat Aging, maximum 0.20 dB/km @ 85 °C
Temperature Dependence, maximum 0.1 dB/km
Temperature Humidity Cycling, maximum 0.2 dB/km
Water Immersion, maximum 0.20 dB/km @ 23 °C

Regulatory Compliance/Certifications

Agency ISO 9001:2015
Classification Designed, manufactured and/or distributed under this quality management system



* Footnotes

CS-5M-TB

Temperature Dependence, maximum

Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)

Temperature Humidity Cycling, maximum

Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity