


# CW2631-000 | FOSC-400BG-S24-3-NN

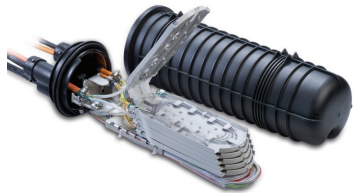

FOSC® 400 BG Fiber Optic Splice Closure, Gel Cable sealing, three pre-installed 24-splice trays

- Single-ended, O-ring sealed dome closure for splicing feeder and distribution cables
- Compatible with most common cable types: e.g. loose tube, central core, ribbon fiber
- FOSC splice trays hinged for access to any splice without disturbing other trays
- Closure can be used in aerial, pedestal and underground (up to 5 meters) environments
- Compatible with CommScope's CWDM modules and optical splitter trays

## Product Classification

<b>Regional Availability</b>	Asia   EMEA
<b>Product Type</b>	Single-ended, round fiber closure
<b>Product Brand</b>	FOSC®
<b>Product Series</b>	FOSC 400G

## General Specifications

<b>Cable Entry Drop Port Style</b>	Round
<b>Cable Entry Main Port Style</b>	Round
<b>Cable Ports Quantity, total</b>	1 oval port (2 cables) + 2 round ports
<b>Cable Sealing Type</b>	Compressed gel
<b>Closure Sealing Type</b>	Dome-to-base clamp with O-ring
<b>Closure Style</b>	Single-ended
<b>Color</b>	Black
<b>Mounting</b>	Pole   Strand   Wall
<b>Network Area Type</b>	Feeder
<b>Splice Tray Included, quantity</b>	3
<b>Splice Tray Type Included</b>	24-way, heat shrink
<b>Splicing Type, Supported</b>	Single fusion

## Dimensions

<b>Main Cable Diameter, maximum</b>	25 mm   0.984 in
-------------------------------------	------------------

## Ordering Tree

# CW2631-000 | FOSC-400BG-S24-3-NN

## FOSC-400 X - X - X - X X

### Closure size

AG	420mm - 2 round ports
BG	540mm - 2 round ports
D5G	710mm - 5 round ports
D5/BG	505mm - 5 round ports

### Tray type

NT	No trays		
Splices in splice protectors at tray exterior			
		AG, BG, D5/BG	D5G
S08	8 SMOUV splice protectors (45mm)	X	
S24	24 SMOUV splice protectors (45mm)	X	
A24	24 ANT splice protectors	X	
4R4	4 splice protectors for ribbon cable with 4 fibers	X	
2R12	2 splice protectors for ribbon cable with 12 fibers		X
Splices stored in modules at tray interior			
		AG, BG, D5/BG	D5G
12	12 splice protectors (2 modules, 6 splices/module)	X	
24	24 splice protectors (2 modules, 12 splices/module)	X	
36	36 splice protectors (6 modules, 6 splices/module)		X
S96	96 SMOUV splice protectors (45mm)		X
L96	96 SMOUV splice protectors (60mm)		X
A96	96 ANT splice protectors		X
RT24	24 splices for ribbon cable with 12 fibers (4 modules, 6 splices/module)		X

### Flash test valve

V	Pre-installed flash test valve
N	No flash test valve

### Ground feedthrough

G	Pre-installed ground feedthrough
N	No ground feedthrough

### Number of splice trays

0	No trays
Closure size	
1...2	AG
1...6	BG
1...12	D5/BG
1...8	D5G

## Material Specifications

**Material Type** Impact-resistant polymer

## Environmental Specifications

**Environmental Space** Below ground | Buried

## Packaging and Weights

**Packaging quantity** 1

**Packaging Type** Box | Carton

**Weight, net** 2.3 kg | 5.071 lb

## Regulatory Compliance/Certifications

# CW2631-000 | FOSC-400BG-S24-3-NN

---

**Agency**

CHINA-ROHS

ISO 9001:2015

REACH-SVHC

ROHS

UK-ROHS

**Classification**

Below maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant as per SVHC revision on [www.commscope.com/ProductCompliance](http://www.commscope.com/ProductCompliance)

Compliant

Compliant

