FDT-BN024NXF50A



iFDT Indoor Fiber Distribution Terminal, 24-fiber, SC/UPC, indoor /outdoor cable, 50 feet

- Compact and secure family of enclosures by connecting fiber cables at MDUs
- Integrated splice trays offer flexible splice management for individual or mass splicing
- Dual-hinged design ensures separation of owner/client network segments
- Robust steel construction protects fibers against damage and ensures network reliability
- Slotted cable entrance ports allow for rapid cable installation and pass-through capability

Product Classification

Regional Availability North America

Product Type Fiber distribution terminal

Product Series IFDT

General Specifications

Adapters, quantity 24

 Cable Entry Location
 Bottom right
 Top right

Cable Type Indoor/outdoor - Stranded

Color Putty white

Front Door Type Double hinged

Growth Configuration Fully loaded

Interface SC/UPC

Interface, stub No connector

Lock Type Padlock ready

Mounting Wall
Port, quantity 24

Dimensions

 Height
 203.2 mm | 8 in

 Width
 355.6 mm | 14 in


 Depth
 127 mm | 5 in

 Cable Length
 15.24 m | 50 ft

Ordering Tree



FDT-BN024NXF50A

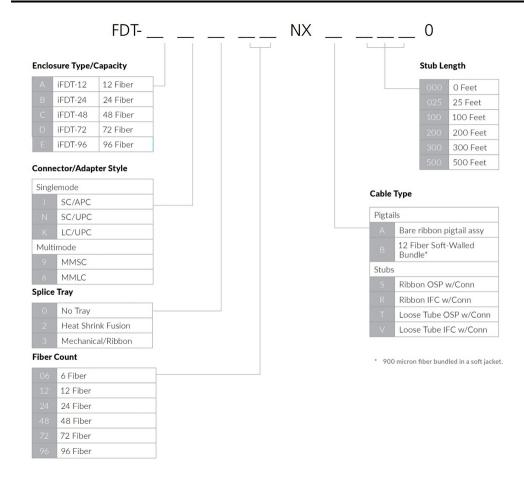

Material Specifications

Finish Powder coated

Material Type Steel

Optical Specifications

Fiber Mode Singlemode

Environmental Specifications

Environmental Space Indoor

Qualification Standards NEMA, Type 12 | Telcordia GR-2898-CORE

Packaging and Weights

Packaging quantity 1



FDT-BN024NXF50A

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted

