### OTE200-06MX-NN-S12-B-W



# Mini-OTE 200-Series, Optical Terminal Enclosure, 6-port mini-size connector (DLX®), no splitter, black, wall mount

- Optical Terminal Enclosures incorporate hardened connector technology that is designed to withstand the rugged outside plant environment
- Functionality to splice and store feeder cable in the field with the possibility to splice in the field two extra branch cables
- Hardened adapters are factory-terminated and environmentally sealed to ensure rapid plug-and play drop cable installations
- Integrated external cable fixation guarantees easy, fast and reliable cable manipulations

#### **Product Classification**

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America

**Product Type** Access terminal, without splitter/tap

Product Brand DLX®

Product Series Mini-OTE 200

#### General Specifications

Cable Type No cable (stubless)

Cable, quantity 0

**Distribution Type** 6 ports **Enclosure Color** Black

Mounting

Handhole | Pole | Wall

Port Type

Hardened mini-size DLX

Port, quantity 6
Splitter, quantity 0

Stub Type No tail

#### **Dimensions**

 Height
 358.5 mm | 14.114 in

 Width
 166 mm | 6.535 in


 Depth
 129.3 mm | 5.091 in


Cable Length, stub 0 ft (0 m)


### Dimension Drawing

COMMSC PE°


# OTE200-06MX-NN-S12-B-W







### Ordering Tree

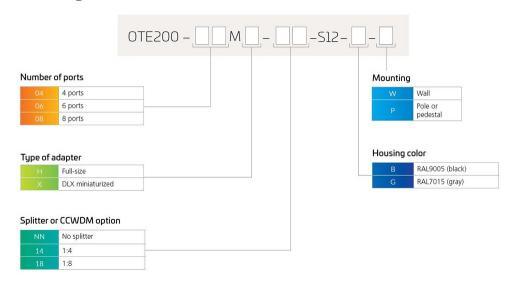

#### Material Specifications

Enclosure Material Type Glass filled polypropylene (GF-PP)

**Optical Specifications** 

**Fiber Type** G.652.D

**Operating Wavelength Range** 1260 – 1635 nm

Attenuation Terminal Connectors, maximum 0.4 dB

Page 2 of 4



## OTE200-06MX-NN-S12-B-W

Insertion Loss, Terminal Connector, typical0.16 dBReturn Loss, Connector, minimum65 dB

**Environmental Specifications** 

**Operating Temperature**  $-40 \,^{\circ}\text{C}$  to  $+65 \,^{\circ}\text{C}$  ( $-40 \,^{\circ}\text{F}$  to  $+149 \,^{\circ}\text{F}$ )

**Relative Humidity** 5%–100%, condensing

Environmental Space Above ground | Below ground | Buried

**Qualification Standards** IEC 60529, IP68 + 3 m waterhead

UV Resistance UV stabilized

Packaging and Weights

Included Cable termination unit (2) | Enclosure (1) | Fiber pigtail cassette

(1) | Splice Cassette (2)

Packaging quantity

Packaging Type Box | Carton

Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

Included Products

CW8094-002 - TENIO™ Cable Termination Unit kit

TENIO-CTU-L-(10)



# CW8094-002 | TENIO-CTU-L-(10)





#### **Product Classification**

Regional Availability EMEA

Product Type Cable termination kit

Product Series TENIO

#### **Environmental Specifications**

Environmental Space Outdoor

#### Packaging and Weights

Packaging quantity 1

Packaging Type Bag | Carton

### Regulatory Compliance/Certifications

#### Agency Classification

CHINA-ROHS Below maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant UK-ROHS Compliant



