


AGX2X2PBH

Base Product



OM4 MPO24 (Pinned) to MPO24 (Unpinned), Fiber Trunk Cable Assembly, 48-Fiber, Method A, Plenum

Product Classification

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin America | Middle East/Africa | North America

Portfolio

CommScope®

Product Type

Fiber trunk cable assembly

Ordering Note

For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may vary based on cable configuration

General Specifications

Color, boot A

Red

Color, connector A

Aqua

Color, boot B

Red

Color, connector B

Aqua

Construction Type

Stranded

Furcation Color

Aqua

Interface, Connector A

MPO-24/UPC Male

Interface, Connector B

MPO-24/UPC Female

Jacket Color

Aqua

Polarity

Method A

Fibers per Subunit, quantity

24

Total Fibers, quantity

48

Dimensions

Cable Assembly Length Range (m)


3 – 999

Cable Assembly Length Range (ft)

10 – 999

Ordering Tree

AGX2X2PBH

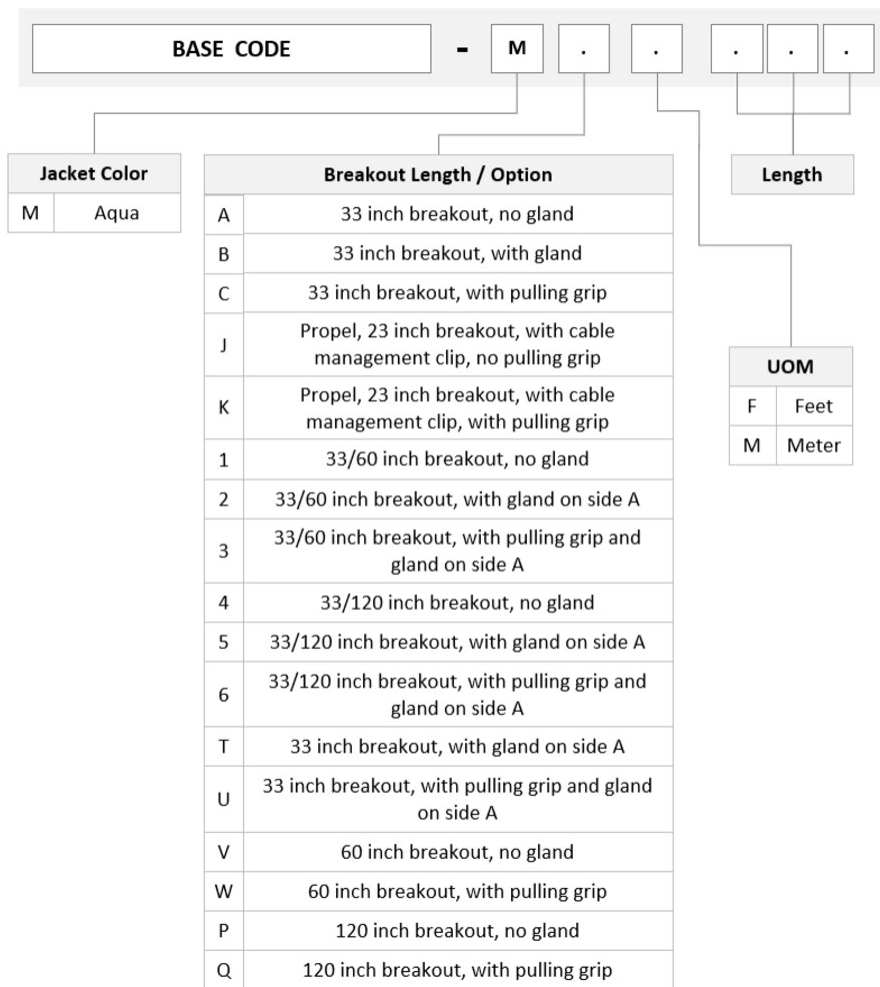

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0° | 4.40 lb @ 90°

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications


AGX2X2PBH

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Above maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant/Exempted |
| UK-ROHS | Compliant/Exempted |



Included Products

| | | |
|------------------------------------|---|--|
| 760256579 P-048-MP-5K-F24AQ/30T | - | Fiber indoor cable, LazrSPEED® Plenum MPO Trunk Cable, 48 fiber with 24-fiber, 3.0mm subunits, Gel-free, Multimode OM4, Feet jacket marking, Aqua jacket color |
| 860662277 | - | MPO24,FEMALE,OM3/4,AQUA,3.0MM |
| 860662278 | - | MPO24,MALE,OM3/4,AQUA,3.0MM |



Fiber indoor cable, LazrSPEED® Plenum MPO Trunk Cable, 48 fiber with 24-fiber, 3.0mm subunits, Gel-free, Multimode OM4, Feet jacket marking, Aqua jacket color

Product Classification

| | |
|------------------------------|--|
| Regional Availability | Asia Australia/New Zealand Latin America Middle East /Africa North America |
| Portfolio | CommScope® |
| Product Type | Fiber indoor cable |
| Product Series | P-MP |


General Specifications

| | |
|-------------------------------------|-----------------|
| Cable Type | MPO trunk cable |
| Construction Type | Non-armored |
| Subunit Type | Gel-free |
| Jacket Color | Aqua |
| Jacket Marking | Feet |
| Subunit, quantity | 2 |
| Fibers per Subunit, quantity | 24 |
| Total Fiber Count | 48 |

Dimensions

| | |
|-------------------------------------|-------------------|
| Height Over Jacket | 5.8 mm 0.228 in |
| Width Over Jacket | 8.8 mm 0.346 in |
| Buffer Tube/Subunit Diameter | 3 mm 0.118 in |

Representative Image

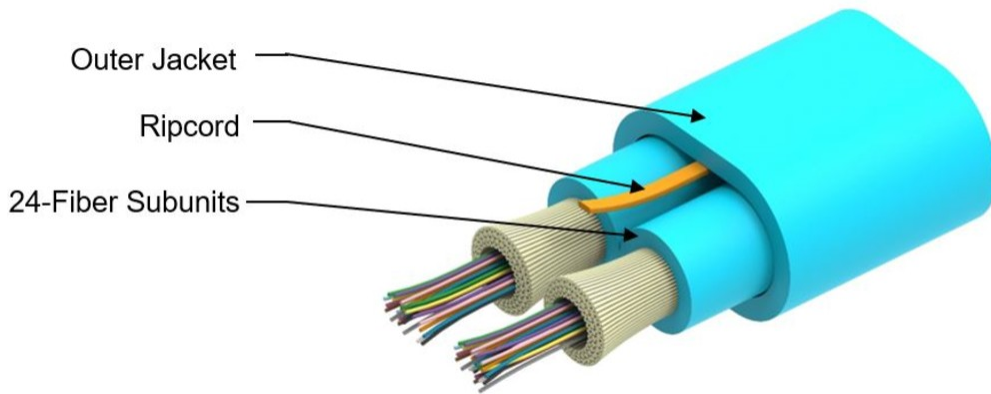

Mechanical Specifications

| | |
|--|---------------------------------------|
| Minimum Bend Radius, loaded | 87 mm 3.425 in |
| Minimum Bend Radius, unloaded | 58 mm 2.283 in |
| Tensile Load, long term, maximum | 200 N 44.962 lbf |
| Tensile Load, short term, maximum | 167 N 37.543 lbf |
| Compression | 10 N/mm 57.101 lb/in |
| Compression Test Method | FOTP-41 IEC 60794-1 E3 |
| Flex | 25 cycles |
| Flex Test Method | FOTP-104 IEC 60794-1 E6 |
| Impact | 2.94 N-m 26.021 in lb |
| Impact Test Method | FOTP-25 IEC 60794-1 E4 |
| Strain | See long and short term tensile loads |
| Strain Test Method | FOTP-33 IEC 60794-1 E1 |
| Twist | 10 cycles |
| Twist Test Method | FOTP-85 IEC 60794-1 E7 |
| Vertical Rise, maximum | 314 m 1,030.184 ft |

Optical Specifications

| | |
|-------------------|---|
| Fiber Type | OM4, LazrSPEED® 550 OM4, LazrSPEED® 550 |
|-------------------|---|

Environmental Specifications

| | |
|---------------------------------|------------------------------------|
| Installation temperature | 0 °C to +70 °C (+32 °F to +158 °F) |
| Operating Temperature | 0 °C to +70 °C (+32 °F to +158 °F) |

760256579 | P-048-MP-5K-F24AQ/30T

| | |
|--------------------------------------|---------------------------------------|
| Storage Temperature | -40 °C to +70 °C (-40 °F to +158 °F) |
| Cable Qualification Standards | ANSI/ICEA S-83-596 Telcordia GR-409 |
| Environmental Space | Plenum |
| Flame Test Listing | NEC OFNP (ETL) and c(ETL) |
| Flame Test Method | NFPA 130 NFPA 262 |

Environmental Test Specifications

| | |
|--------------------------------------|------------------------------------|
| Low High Bend | 0 °C to +70 °C (+32 °F to +158 °F) |
| Low High Bend Test Method | FOTP-37 IEC 60794-1 E11 |
| Temperature Cycle | 0 °C to +70 °C (+32 °F to +158 °F) |
| Temperature Cycle Test Method | FOTP-3 IEC 60794-1 F1 |


Packaging and Weights

| | |
|---------------------|--------------------------|
| Cable weight | 65 kg/km 43.678 lb/kft |
|---------------------|--------------------------|

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

860662277



MPO24,FEMALE,OM3/4,AQUA,3.0MM

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Portfolio | CommScope® |
| Product Type | Fiber connector |
| Product Brand | LazrSPEED® |

General Specifications

| | |
|--------------------------|----------------|
| Color | Aqua |
| Color, boot | Red |
| Ferrule Geometry | Flat |
| Interface | MPO/UPC Female |
| Interface Feature | Unpinned |
| Total Fiber Count | 24 |

Dimensions

| | |
|----------------------------------|--------------------|
| Length | 60.1 mm 2.366 in |
| Compatible Cable Diameter | 3 mm 0.118 in |

Material Specifications

| | |
|-------------------------|---------|
| Ferrule Material | Polymer |
|-------------------------|---------|

Mechanical Specifications

| | |
|--|----------------|
| Cable Retention Strength, maximum | 11.24 lb @ 0 ° |
|--|----------------|

Optical Specifications

| | |
|--------------------------------------|------------------|
| Fiber Mode | Multimode |
| Fiber Type | OM3 OM4 |
| Insertion Loss Change, mating | 0.7 dB |
| Optical Components Standard | ANSI/TIA-568-C.3 |

860662277

| | |
|---|--------|
| Insertion Loss Change, temperature | 0.7 dB |
| Insertion Loss, maximum | 0.7 dB |
| Return Loss, minimum | 28 dB |


Packaging and Weights

| | |
|---------------------------|---|
| Packaging quantity | 1 |
|---------------------------|---|

* Footnotes

| | |
|---|---|
| Insertion Loss Change, mating | TIA-568: Maximum insertion loss change after 500 matings |
| Insertion Loss Change, temperature | Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F) |

860662278



MPO24,MALE,OM3/4,AQUA,3.0MM

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Portfolio | CommScope® |
| Product Type | Fiber connector |
| Product Brand | LazrSPEED® |

General Specifications

| | |
|--------------------------|--------------|
| Color | Aqua |
| Color, boot | Red |
| Ferrule Geometry | Flat |
| Interface | MPO/UPC Male |
| Interface Feature | Unpinned |
| Total Fiber Count | 24 |

Dimensions

| | |
|----------------------------------|--------------------|
| Length | 60.1 mm 2.366 in |
| Compatible Cable Diameter | 3 mm 0.118 in |

Material Specifications

| | |
|-------------------------|---------|
| Ferrule Material | Polymer |
|-------------------------|---------|

Mechanical Specifications

| | |
|--|----------------|
| Cable Retention Strength, maximum | 11.24 lb @ 0 ° |
|--|----------------|

Optical Specifications

| | |
|--------------------------------------|------------------|
| Fiber Mode | Multimode |
| Fiber Type | OM3 OM4 |
| Insertion Loss Change, mating | 0.7 dB |
| Optical Components Standard | ANSI/TIA-568-C.3 |

860662278

| | |
|---|--------|
| Insertion Loss Change, temperature | 0.7 dB |
| Insertion Loss, maximum | 0.7 dB |
| Return Loss, minimum | 28 dB |

Packaging and Weights

| | |
|---------------------------|---|
| Packaging quantity | 1 |
|---------------------------|---|

* Footnotes

| | |
|---|---|
| Insertion Loss Change, mating | TIA-568: Maximum insertion loss change after 500 matings |
| Insertion Loss Change, temperature | Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F) |