# CHJRG | IPO6-24RUTP-PG2H-1100E

### **Base Product**



InstaPATCH® Cu GigaSPEED XL® U/UTP Riser Preterminated Copper Cable, dual row high density RJ45 plug to 360 1100 Evolve module, 24 links

## **Product Classification**

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio CommScope®

Product Type Copper trunk cable assembly

Product Brand GigaSPEED XL® | InstaPATCH® Cu

General Specifications

ANSI/TIA Category 6

Cable Type U/UTP (unshielded)

Conductor Type Solid

Interface, Connector A RJ45 plug

Interface Feature, connector ADual rowHigh densityInterface, Connector B360 1100 Evolve module

Interface Feature, connector B Standard

 Link Count
 24

 Wiring
 T568B

**Dimensions** 

Cable Assembly Length Range (m)2-30Cable Assembly Length Range (ft)7-98


**Electrical Specifications** 

dc Resistance, maximum0.3 ohmSafety Voltage Rating300 V

Ordering Tree



#### IPO6-24RUTP-PG2H-1100E **CHJRG**

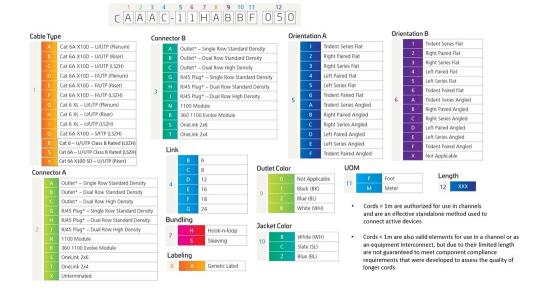

# **Environmental Specifications**

-10 °C to +60 °C (+14 °F to +140 °F) **Operating Temperature** 

**Environmental Space** Riser

**Flammability Rating** UL 94 V-0

# Regulatory Compliance/Certifications

#### **Agency** Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

# Included Products

GigaSPEED XL® 1071E ETL Verified Category 6 U/UTP Cable, non-plenum, 4 pair count 1071E-4/23

SYSTIMAX 360™ GigaSPEED XL® 1100GS3 Evolve Category 6 U/UTP Distribution Module, 6 760151167 360-IPR-1100-GS3-DM6

port

