

RealFlex® 3 Fiber Optic Drop Cable Assembly for indoor/outdoor applications

- Allow for a fiber bend radius as small as 7.5 millimeters without changing attenuation characteristics, and improve the insertion loss (IL) performance for 90-degree bend locations
- Available in outdoor and indoor configurations, with both riser and plenum cable types for use in residential, business, or MDU (multi-dwelling unit) structures
- Cables can also be stapled, (using CommScope-approved staplers and staples), allowing fast and easy securing of cables to most surfaces
- Rugged 3-millimeter cable construction provides the flexibility and durability to withstand the most demanding applications


Product Classification

Regional Availability	Latin America North America
Portfolio	CommScope®
Product Type	Fiber drop cable assembly
Product Brand	RealFlex®
Product Series	MDC

General Specifications

Cable Type	Stapleable - Round
Jacket Color	Ivory

Ordering Tree

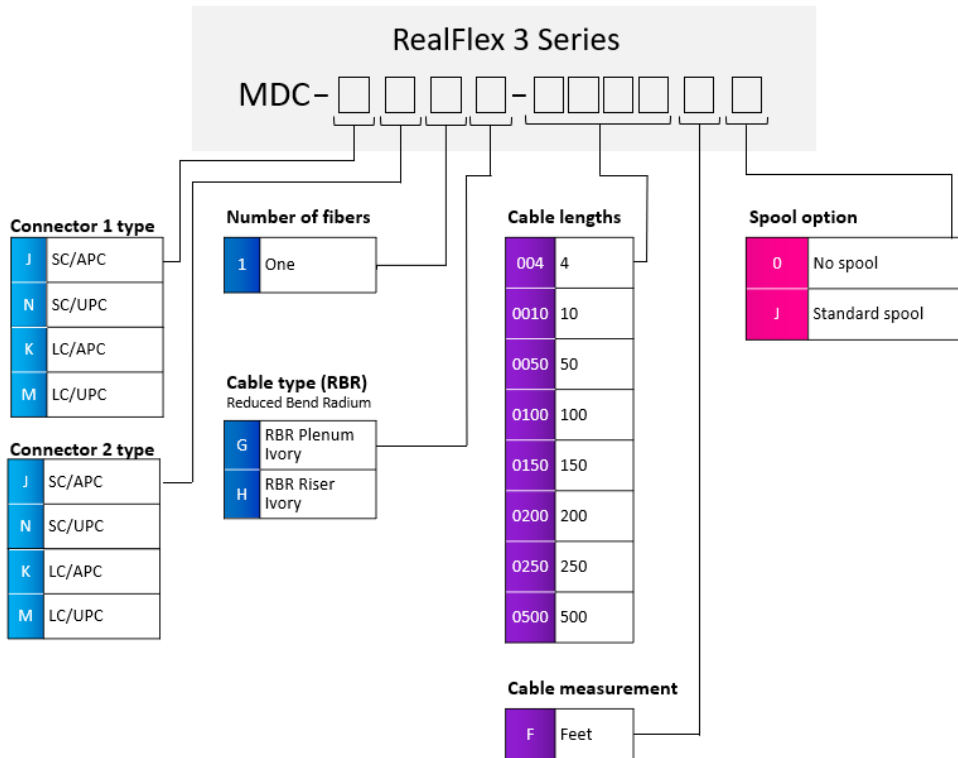

* Cable length shown as an example; additional cable lengths available upon request up to 2,000

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.657.A2/B2

Environmental Specifications

Installation temperature -20 °C to -60 °C (-4 °F to -76 °F)

Operating Temperature -40 °C to +70 °C (-40 °F to +158 °F)

Storage Temperature -40 °C to +75 °C (-40 °F to +167 °F)

Jacket UV Resistance UV stabilized

Packaging and Weights

Cable weight 7.9 kg/km | 5.309 lb/kft