

Fiber indoor/outdoor drop cable, 8-fiber, ULSZH, loose tube, gel-filled, Singlemode G.652.D and G.657.A1, Yellow jacket color, Dca flame rating. Provides Rodent Resistance

## OBSOLETE

This product was discontinued on: March 31, 2023

## Product Classification

<b>Regional Availability</b>	Australia/New Zealand   EMEA
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber indoor/outdoor cable
<b>Product Series</b>	C-CA


## General Specifications

<b>Armor Type</b>	Non-metallic rods
<b>Cable Type</b>	Central loose tube
<b>Construction Type</b>	All Dielectric   Armored
<b>Subunit Type</b>	Gel-filled
<b>Filler, quantity</b>	1
<b>Jacket Color</b>	Yellow
<b>Jacket Marking</b>	Meters
<b>Subunit, quantity</b>	1
<b>Fibers per Subunit, quantity</b>	8
<b>Total Fiber Count</b>	8

## Dimensions

<b>Cable Length</b>	2000 m   6,561.68 ft
<b>Diameter Over Jacket</b>	9 mm   0.354 in

## Representative Image

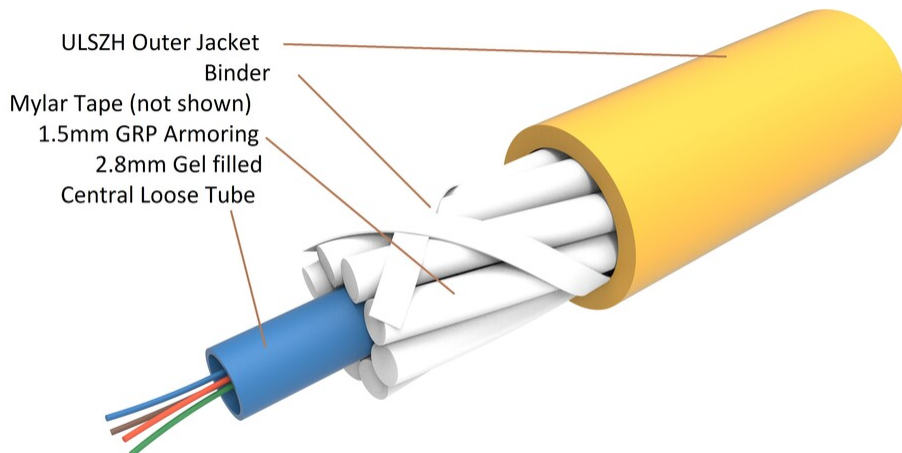

## Mechanical Specifications

<b>Minimum Bend Radius, loaded</b>	230 mm   9.055 in
<b>Minimum Bend Radius, unloaded</b>	175 mm   6.89 in
<b>Tensile Load, long term, maximum</b>	750 N   168.607 lbf
<b>Tensile Load, short term, maximum</b>	2000 N   449.618 lbf
<b>Compression</b>	20 N/mm   114.203 lb/in
<b>Compression Test Method</b>	IEC 60794-1-2 E3
<b>Impact</b>	5 N-m   44.254 in lb
<b>Impact Test Method</b>	IEC 60794-1 E4

## Optical Specifications

<b>Fiber Type</b>	OS2
-------------------	-----

## Optical Specifications, Wavelength Specific

<b>Attenuation, maximum</b>	0.35 dB/km @ 1,300 nm   0.35 dB/km @ 1,550 nm   0.45 dB/km @ 1,310 nm
<b>Standards Compliance</b>	IEC 60794-1   TIA-492CAAB (OS2)

## Environmental Specifications

<b>Installation temperature</b>	-5 °C to +50 °C (+23 °F to +122 °F)
---------------------------------	-------------------------------------

<b>Operating Temperature</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>Storage Temperature</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>Cable Qualification Standards</b>	IEC 60794-1-2
<b>EN50575 CPR Cable EuroClass Fire Performance</b>	Dca
<b>EN50575 CPR Cable EuroClass Smoke Rating</b>	s2
<b>EN50575 CPR Cable EuroClass Droplets Rating</b>	d2
<b>EN50575 CPR Cable EuroClass Acidity Rating</b>	a1
<b>Environmental Space</b>	Universal Low Smoke Zero Halogen (ULSZH)

## Environmental Test Specifications

<b>Temperature Cycle</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>Temperature Cycle Test Method</b>	IEC 60794-1-2 F1

## Packaging and Weights

<b>Cable weight</b>	60 kg/km   40.318 lb/kft
---------------------	--------------------------

## Included Products

CS-8W-250-EMEA – LightScope ZWP® Singlemode Fiber  
250um

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable