

# RRZZ-65A-R4N43



8-port sector antenna, 4 x 694–960, 4 x 1427–2690 MHz, 65° HPBW, 4x RET

- All Internal RET actuators are connected in “Cascaded SRET” configuration
- Antenna shape optimized for wind load reduction
- Retractable tilt indicator rods

## General Specifications

<b>Antenna Type</b>	Sector
<b>Band</b>	Multiband
<b>Color</b>	Light Gray (RAL 7035)
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage
<b>Radome Material</b>	Fiberglass, UV resistant
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	4.3-10 Female
<b>RF Connector Location</b>	Bottom
<b>RF Connector Quantity, high band</b>	4
<b>RF Connector Quantity, low band</b>	4
<b>RF Connector Quantity, total</b>	8

## Remote Electrical Tilt (RET) Information


<b>RET Hardware</b>	CommRET v2
<b>RET Interface</b>	8-pin DIN Female   8-pin DIN Male
<b>RET Interface, quantity</b>	2 female   2 male
<b>Input Voltage</b>	10–30 Vdc
<b>Internal RET</b>	High band (2)   Low band (2)
<b>Power Consumption, active state, maximum</b>	8 W
<b>Power Consumption, idle state, maximum</b>	1 W
<b>Protocol</b>	3GPP/AISG 2.0 (Single RET)

## Dimensions

# RRZZ-65A-R4N43

<b>Width</b>	430 mm   16.929 in
<b>Depth</b>	197 mm   7.756 in
<b>Length</b>	1599 mm   62.953 in
<b>Net Weight, antenna only</b>	26.27 kg   57.915 lb

## Array Layout

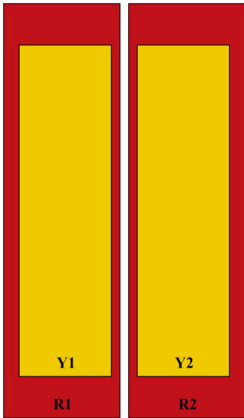

Array ID	Frequency (MHz)	RF Connector	HPBW	RET (SRET)	AISG No.	AISG RET UID
R1	694-960	1 - 2	65°	1	AISG1	CPxxxxxxxxxxxxxxxxR1
R2	694-960	3 - 4	65°	2	AISG1	CPxxxxxxxxxxxxxxxxR2
Y1	1427-2690	5 - 6	65°	3	AISG1	CPxxxxxxxxxxxxxxxxY1
Y2	1427-2690	7 - 8	65°	4	AISG1	CPxxxxxxxxxxxxxxxxY2


(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration

# RRZZ-65A-R4N43



## Logo Image

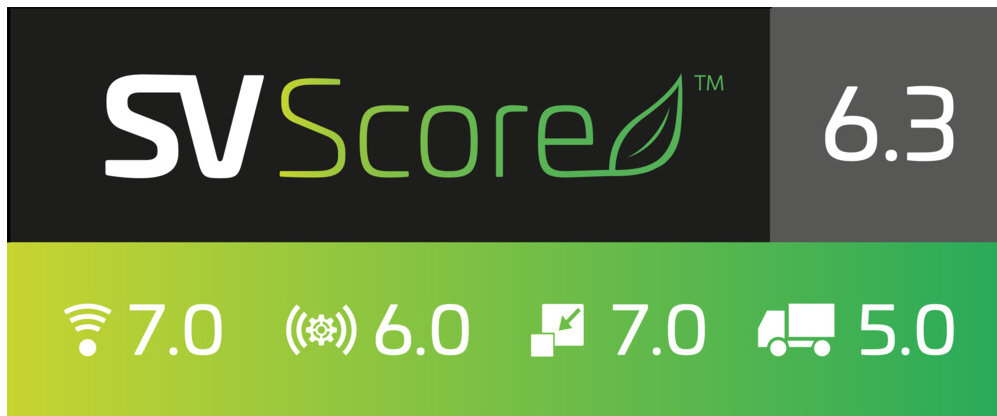

## Electrical Specifications

# RRZZ-65A-R4N43

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	1427 – 2690 MHz   694 – 960 MHz
<b>Polarization</b>	±45°
<b>Total Input Power, maximum</b>	900 W @ 50 °C

## Electrical Specifications

	<b>R1,R2</b>	<b>R1,R2</b>	<b>R1,R2</b>	<b>Y1,Y2</b>	<b>Y1,Y2</b>	<b>Y1,Y2</b>	<b>Y1,Y2</b>	<b>Y1,Y2</b>
<b>Frequency Band, MHz</b>	<b>694–790</b>	<b>790–890</b>	<b>890–960</b>	<b>1427–1518</b>	<b>1695–1920</b>	<b>1920–2180</b>	<b>2300–2500</b>	<b>2500–2690</b>
<b>RF Port</b>	1,2,3,4	1,2,3,4	1,2,3,4	5,6,7,8	5,6,7,8	5,6,7,8	5,6,7,8	5,6,7,8
<b>Gain, dBi</b>	13.6	14.1	14.6	16.1	17.7	18.5	19.1	19
<b>Beamwidth, Horizontal, degrees</b>	62	55	52	71	59	59	56	56
<b>Beamwidth, Vertical, degrees</b>	13.5	12.1	11.3	7.4	6.1	5.5	4.8	4.5
<b>Beam Tilt, degrees</b>	2–16	2–16	2–16	2–12	2–12	2–12	2–12	2–12
<b>USLS (First Lobe), dB</b>	15	18	19	17	18	17	17	19
<b>Front-to-Back Ratio at 180°, dB</b>	29	29	32	33	35	35	35	33
<b>Isolation, Cross Polarization, dB</b>	25	25	25	26	26	26	26	26
<b>Isolation, Inter-band, dB</b>	25	25	25	26	26	26	26	26
<b>VSWR   Return loss, dB</b>	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
<b>PIM, 3rd Order, 2 x 20 W, dBc</b>	-153	-153	-153	-153	-153	-153	-153	-153
<b>Input Power per Port at 50°C, maximum, watts</b>	300	300	300	250	250	250	200	200

## Electrical Specifications, BASTA

	<b>694–790</b>	<b>790–890</b>	<b>890–960</b>	<b>1427–1518</b>	<b>1695–1920</b>	<b>1920–2180</b>	<b>2300–2500</b>	<b>2500–2690</b>
<b>Frequency Band, MHz</b>	<b>694–790</b>	<b>790–890</b>	<b>890–960</b>	<b>1427–1518</b>	<b>1695–1920</b>	<b>1920–2180</b>	<b>2300–2500</b>	<b>2500–2690</b>
<b>Gain by all Beam Tilts, average, dBi</b>	13.2	13.7	14.2	15.7	17.3	18.2	18.8	18.7
<b>Gain by all Beam Tilts Tolerance, dB</b>	±0.4	±0.6	±0.5	±0.6	±0.8	±0.5	±0.4	±0.5
<b>Beamwidth, Horizontal Tolerance, degrees</b>	±7	±5	±5	±7	±8	±4	±3	±4
<b>Beamwidth, Vertical Tolerance, degrees</b>	±0.9	±0.5	±0.6	±0.4	±0.4	±0.4	±0.2	±0.2
<b>USLS, beampeak to 20° above beampeak, dB</b>		18	18	15	16	16	17	19
<b>Front-to-Back Total Power at</b>	21	21	21	24	27	28	30	28

# RRZZ-65A-R4N43

180° ± 30°, dB

<b>CPR at Boresight, dB</b>	20	19	18	16	21	17	18	17
<b>CPR at Sector, dB</b>	11	8	10	11	9	6	5	4

## Mechanical Specifications

<b>Wind Loading @ Velocity, frontal</b>	376.0 N @ 150 km/h (84.5 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	203.0 N @ 150 km/h (45.6 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, maximum</b>	594.0 N @ 150 km/h (133.5 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	243.0 N @ 150 km/h (54.6 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241 km/h (150 mph)

## Packaging and Weights

<b>Width, packed</b>	530 mm   20.866 in
<b>Depth, packed</b>	349 mm   13.74 in
<b>Length, packed</b>	1771 mm   69.724 in
<b>Weight, gross</b>	36.2 kg   79.807 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

BSAMNT-3	– Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	--

## \* Footnotes

<b>Performance Note</b>	Severe environmental conditions may degrade optimum performance
-------------------------	---

# BSAMNT-3

---



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

## Product Classification

**Product Type** Downtilt mounting kit

## General Specifications

**Application** Outdoor

**Color** Silver

## Dimensions

**Compatible Diameter, maximum** 115 mm | 4.528 in

**Compatible Diameter, minimum** 60 mm | 2.362 in

**Weight, net** 6.2 kg | 13.669 lb

## Material Specifications

**Material Type** Galvanized steel

## Packaging and Weights

**Included** Brackets | Hardware

**Packaging quantity** 1

**Weight, gross** 6.4 kg | 14.11 lb

## Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant

# BSAMNT-3

---

