

Fiber Optic Cable, Indoor Zero Halogen, CPR-only flame rated, Stranded Loose Tube All-Dielectric

- CommScope's indoor fiber cables are positioned for Data Center or Central Office applications
- Superior mechanical and optical performance with unmatched stability and quality
- Available Jacket Colors: Aqua and Yellow

Product Classification

Asia Australia/New Zealand EMEA Latin America North America	
CommScope®	
Fiber indoor cable	
L-LN	

General Specifications

Cable Type	Stranded microsheath tube
Construction Type	Non-armored
Subunit Type	Gel-free


Ordering Tree

Page 1 of 2

©2022 CommScope, Inc. All rights reserved. All trademarks identified by ® or [™] are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: March 10, 2022



L-LN

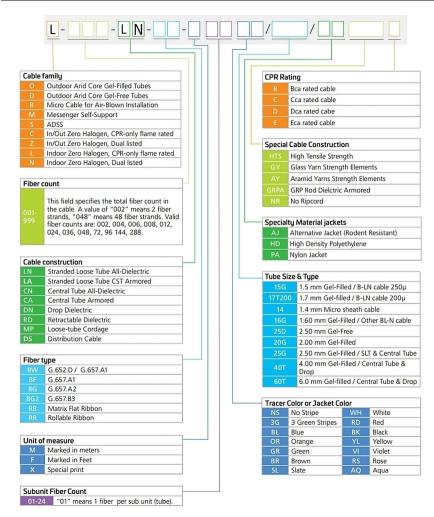

Material Specifications

Inner Jacket Material

Low Smoke Zero Halogen (LSZH)

Environmental Specifications

Installation temperature	0 °C to +50 °C (+32 °F to +122 °F)
Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Environmental Space	Low Smoke Zero Halogen (LSZH)

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

Page 2 of 2

©2022 CommScope, Inc. All rights reserved. All trademarks identified by ® or [™] are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: March 10, 2022

