

# JM-CAPKIT

---



## 2.2-5 Male End Cap Assembly

### Product Classification

<b>Product Type</b>	Surge arrester accessory
<b>Product Brand</b>	HELIAX®
<b>Ordering Note</b>	ANDREW® non-standard product

### General Specifications


<b>Interface</b>	2.2-5 Male
------------------	------------

### Dimensions

<b>Height</b>	13.96 mm   0.55 in
<b>Width</b>	13.96 mm   0.55 in
<b>Length</b>	22.5 mm   0.886 in

### Outline Drawing

# JM-CAPKIT

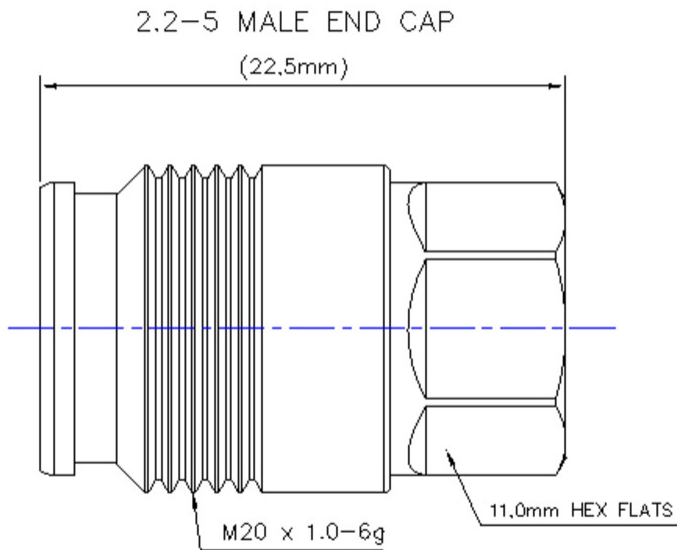

## Material Specifications

<b>Finish</b>	Trimetal
<b>Material Type</b>	Brass

## Mechanical Specifications

<b>Coupling Nut Proof Torque</b>	4 N-m   35.403 in lb
<b>Interface Durability</b>	50 cycles
<b>Mechanical Shock Test Method</b>	IEC 60068-2-27

## Environmental Specifications

<b>Operating Temperature</b>	-55 °C to +85 °C (-67 °F to +185 °F)
<b>Storage Temperature</b>	-65 °C to +125 °C (-85 °F to +257 °F)
<b>Corrosion Test Method</b>	IEC 60068-2-11
<b>Immersion Depth</b>	1 m
<b>Immersion Test Mating</b>	Mated
<b>Immersion Test Method</b>	IEC 60529:2001, IP68

# JM-CAPKIT

---

<b>Moisture Resistance Test Method</b>	IEC 60068-2-3
<b>Thermal Shock Test Method</b>	IEC 60068-2-14
<b>Vibration Test Method</b>	IEC 60068-2-6

## Packaging and Weights

<b>Packaging quantity</b>	1
<b>Weight, net</b>	18.36 g   0.04 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a>

## \* Footnotes

<b>Immersion Depth</b>	Immersion at specified depth for 24 hours
------------------------	---