

Fiber indoor/outdoor cable, 24-fiber, ULSZH, loose tube, Singlemode G.652.D, gel-filled, Custom jacket marking, Blue jacket color, Eca flame rating. Provides Rodent Resistance

## Product Classification

<b>Regional Availability</b>	Australia/New Zealand   EMEA
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber indoor/outdoor cable
<b>Product Series</b>	C-CA


## General Specifications

<b>Armor Type</b>	Non-metallic rods
<b>Cable Type</b>	Loose tube
<b>Construction Type</b>	Armored
<b>Subunit Type</b>	Gel-filled
<b>Jacket Color</b>	Blue
<b>Jacket Marking</b>	Meters
<b>Jacket Marking Method</b>	Inkjet
<b>Jacket Marking Text</b>	HAL T/COM 024F-01T 9/125 SerialNo/YY/MM XXXXM
<b>Subunit, quantity</b>	1
<b>Fibers per Subunit, quantity</b>	24
<b>Total Fiber Count</b>	24

## Dimensions

<b>Cable Length</b>	2000 m   6,561.68 ft
<b>Buffer Tube/Subunit Diameter</b>	4 mm   0.157 in
<b>Diameter Over Jacket</b>	11 mm   0.433 in

## Representative Image

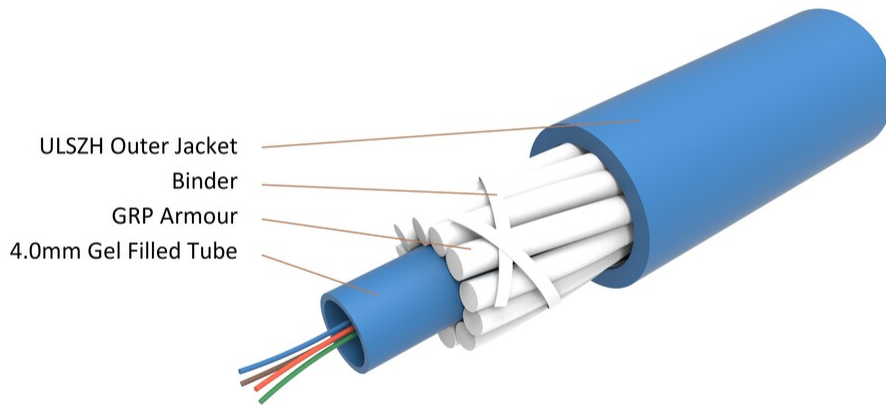

## Mechanical Specifications

<b>Minimum Bend Radius, loaded</b>	320 mm   12.598 in
<b>Minimum Bend Radius, unloaded</b>	240 mm   9.449 in
<b>Tensile Load, long term, maximum</b>	750 N   168.607 lbf
<b>Tensile Load, short term, maximum</b>	3000 N   674.427 lbf
<b>Cable Crush Resistance, maximum</b>	30 N/mm   171.304 lb/in
<b>Compression</b>	30 N/mm   171.304 lb/in
<b>Compression Test Method</b>	IEC 60794-1-2 E3
<b>Impact</b>	5 N-m   44.254 in lb
<b>Impact Test Method</b>	IEC 60794-1 E4
<b>Twist</b>	5 cycles
<b>Twist Test Method</b>	IEC 60794-1 E7

## Optical Specifications

<b>Fiber Type</b>	G.652.D
-------------------	---------

## Environmental Specifications

<b>Installation temperature</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>Operating Temperature</b>	-20 °C to +70 °C (-4 °F to +158 °F)

# 760254713 | C-024-CA-8W-X24BL/40G/GRP/D

---

<b>Storage Temperature</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>EN50575 CPR Cable EuroClass Fire Performance</b>	Eca
<b>Environmental Space</b>	Universal Low Smoke Zero Halogen (ULSZH)

## Environmental Test Specifications

<b>Temperature Cycle</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>Temperature Cycle Test Method</b>	IEC 60794-1-2 F1

## Packaging and Weights

<b>Cable weight</b>	142 kg/km   95.42 lb/kft
---------------------	--------------------------

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



## Included Products

- CS-8W-LT – TeraSPEED® G652D/G657A1 Singlemode Fiber

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable