PPLUJVDLCUCF



Propel ULL Multimode OM5 Cabled Module, 2x12 duplex LC Propel module on End A to Stub on End B, 24 fiber LSZH Trunk, Method B Enhanced

- This component requires 3 of the 12 lanes on the Propel Panel blade
- Ultra-low loss (ULL) with Method B Enhanced polarity
- End A module can be installed from rear of panel
- Serialized QR code provides easy access to factory optical test results

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio SYSTIMAX®

Product Type Fiber cabled module

Product Brand Propel
Product Series PPL

Ordering Note For lengths greater than 999 ft (304 m), orders must be in meters | Maximum length is

400 meters

General Specifications

Configuration Type PROPEL Module to Stub

Cable Color Lime green

Cable Type Trunk Cable - LSZH

Interface, front LC/UPC

Interface Feature, front Duplex | Shuttered

Interface Color, front Lime green

Interface, rearStubModule Size, end A12 fiber

Module Quantity, end A 2

Polarity Method B Enhanced (ULL)

Total Fibers, quantity 24

Total Ports, quantity, front 12

Dimensions

Height 11 mm | 0.433 in

COMMSCSPE®

PPLUJVDLCUCF

Width 196 mm | 7.717 in


Depth 170 mm | 6.693 in

Breakout Length, end B 0 in

1 - 400Cable Assembly Length Range (m)

Cable Assembly Length Range (ft) 2 - 999

Ordering Tree

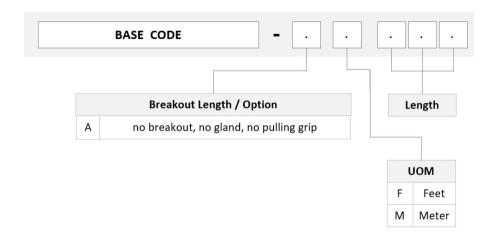

Optical Specifications

Fiber Mode Multimode

Fiber Type OM5

0.35 dB Insertion Loss, maximum

Environmental Specifications

Qualification Standards IEC 61753-1 | TIA-568.3-D

Safety Standard c-UL-us

Packaging and Weights

Packaging quantity

Regulatory Compliance/Certifications

Classification Agency

CHINA-ROHS Above maximum concentration value

ROHS Compliant/Exempted

Page 2 of 3



PPLUJVDLCUCF

UK-ROHS

Compliant/Exempted



Included Products

760244156 N-024-MP-5G-F12LM/20T/D Fiber indoor cable, LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk, 24 fiber with 12 fiber 2.0mm subunits, Gel-free, Multimode OM5, Feet jacket marking, Lime green jacket color

