

HELIAX® Hybrid Cable with aluminum armor

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Hybrid cable, copper and fiber
Product Brand	HELIAX®

General Specifications

Application	Remote radio head
Armor Type	Corrugated aluminum
Cable Type	Wireless feeder
Conductors, quantity	8
Construction Type	Armored
Fiber Short Description	RFF – 8AWG
Fiber Type, quantity	16
Fibers per Subunit, quantity	8
Filler, quantity	3
Inner Shield (Tape) Material	Corrugated aluminum
Jacket Color	Black
Outer Shield (Tape) Material	PE
Strength Members	Glass reinforced plastic rod
Subunit, quantity	2
Total Fiber Count	16
Water Blocking Method	Water blocking tape(s) Water blocking threads

760179952 | HFC-16SM-808-APE


Dimensions

Buffer Tube/Subunit Diameter	5.334 mm 0.21 in
Diameter Over Jacket	27.94 mm 1.1 in
Conductor Gauge	8 AWG

Electrical Specifications

dc Resistance Note	Maximum value based on a standard condition of 20 °C (68 °F)
dc Resistance, maximum	2.146 ohms/km 0.654 ohms/kft

Representative Image

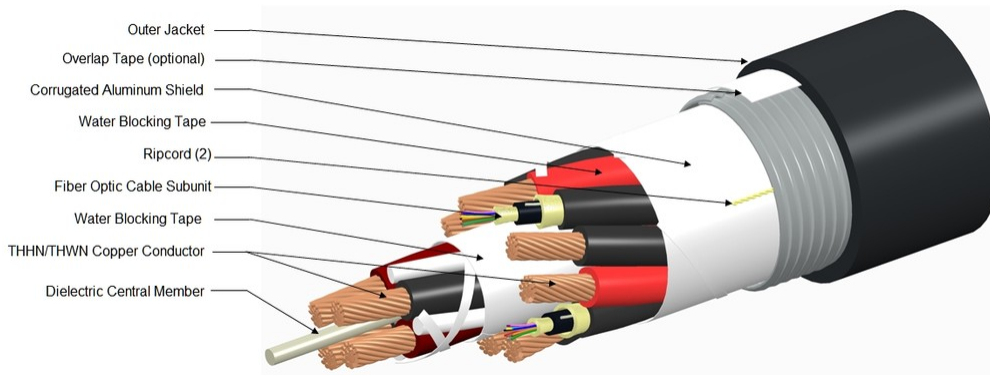

Material Specifications

Ripcord Material	Para-aramid synthetic fiber
-------------------------	-----------------------------

Mechanical Specifications

Minimum Bend Radius, multiple bends, loaded	558.8 mm 22 in
Minimum Bend Radius, multiple bends, unloaded	279.4 mm 11 in
Minimum Bend Radius, single bend, unloaded	195.58 mm 7.7 in
Tensile Load, long term, maximum	1,067.573 N 240 lbf
Tensile Load, short term, maximum	3,558.576 N 800 lbf
Compression	2.25 kg/mm 126 lb/in
Compression Test Method	FOTP-41
Flex Test Method	FOTP-104
Impact	2.17 ft lb 2.942 N-m
Impact Test Method	FOTP-25
Twist	10 cycles

760179952 | HFC-16SM-808-APE

Twist Test Method FOTP-85

Optical Specifications

Fiber Type G.657.A2/B2 | G.657.A2/B2

Environmental Specifications

Installation temperature -30 °C to +70 °C (-22 °F to +158 °F)

Operating Temperature -40 °C to +80 °C (-40 °F to +176 °F)

Storage Temperature -40 °C to +80 °C (-40 °F to +176 °F)

Cable Qualification Standards ANSI/ICEA S-87-640 | Telcordia GR-20 | Telcordia GR-409

Environmental Space Wireless installation

Packaging and Weights

Cable weight 1,131.005 kg/km | 760 lb/kft

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant



Included Products

CS-8G-MP	-	Enhanced Low Macrobending, Zero Water Peak, Dispersion-Unshifted Singlemode Fiber (ITU-T G.657.A2, B2)
----------	---	--

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable