

# SRC3-U5A1B1BG000



NOVUX™ Specialty Range Closure 100, splice only, no adapters, no splitters, 12 splices, SMOUV® 45mm splice protectors, black, 4x NVX-CR-MC-FT-NN cable retention

- Modern drop solution offering providers the agility and flexibility to use it in last-mile fiber network applications, both above and below ground
- Protected from harsh conditions by CommScope's Octopus gel sealing technology
- Agnostic to connectivity technologies: splice, connector, field-installable connector for agility and flexibility
- Identification plate for either QR code or customer logo
- QR code and CommScope cTrak® app for one-click access to all product information

## Product Classification

<b>Regional Availability</b>	Asia   EMEA   Latin America   North America
<b>Regional Availability Note</b>	Contact your local CommScope representative for specific availability
<b>Product Type</b>	Single-ended, rectangular fiber closure
<b>Product Brand</b>	NOVUX™
<b>Product Series</b>	SRC100

## General Specifications

<b>Cable Capacity, Drop</b>	4 Flat 8.0 x 4.5 mm (0.30 x 0.17 in)   4 Round 1.2–8.0 mm (0.05–0.31 in)
<b>Cable Ports Quantity, total</b>	4 multi-out ports (8 cables)
<b>Cable Sealing Type</b>	Compressed gel
<b>Cable Termination Attachments, quantity</b>	2
<b>Closure Sealing Type</b>	Hinged with latch
<b>Closure Style</b>	Single-ended
<b>Color</b>	Black
<b>Mounting</b>	Handhole   Partially buried   Pedestal   Wall/Pole Mount, mounting kit included
<b>Network Area Type</b>	Drop
<b>Port Type</b>	No adapter   No adapter
<b>Port, quantity</b>	0
<b>Splice Tray Included, quantity</b>	1
<b>Splice Tray Type Included</b>	12-way, heat shrink


# SRC3-U5A1B1BG000

<b>Splicing Capacity, maximum</b>	12
<b>Splicing Capacity, Single Fusion, maximum</b>	12
<b>Splicing Type, Supported</b>	Single fusion
<b>Splitter Type</b>	No splitter
<b>Splitter, quantity</b>	0

## Dimensions

<b>Height</b>	267 mm   10.512 in
<b>Width</b>	117 mm   4.606 in
<b>Depth</b>	49 mm   1.929 in
<b>Cable Entry Drop Port Diameter</b>	8 mm (0.31 in) mm

## Ordering Tree

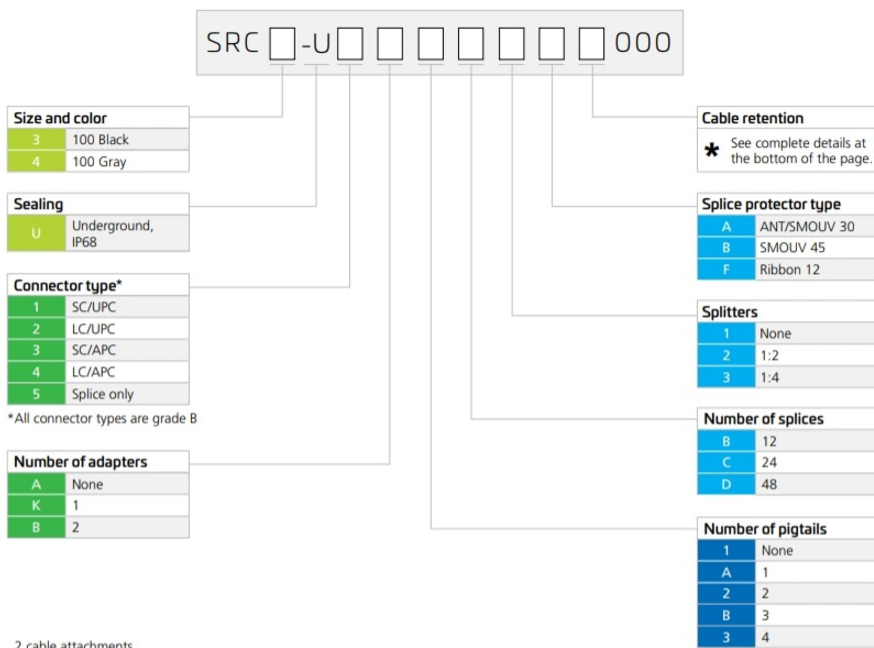

\*All connector types are grade B

2 cable attachments are supplied.

<table border="1"> <thead> <tr> <th colspan="2">Cable retention*</th> </tr> </thead> <tbody> <tr><td>A</td><td>None</td></tr> <tr><td>B</td><td>NVX-CR-MC-FT-NN</td></tr> <tr><td>C</td><td>NVX-CR-MC-RD-NN</td></tr> <tr><td>D</td><td>NVX-CR-SA-SM-NN</td></tr> <tr><td>E</td><td>NVX-CR-TI-SM-NN</td></tr> <tr><td>F</td><td>NVX-CR-DU-FL-NN</td></tr> <tr><td>G</td><td>4xNVX-CR-MC-FT-NN</td></tr> <tr><td>H</td><td>4xNVX-CR-MC-RD-NN</td></tr> <tr><td>I</td><td>4xNVX-CR-SA-SM-NN</td></tr> <tr><td>J</td><td>4xNVX-CR-TI-SM-NN</td></tr> <tr><td>K</td><td>4xNVX-CR-DU-FL-NN</td></tr> <tr><td>L</td><td>2xNVX-CR-MC-FT-NN and 2xNVX-CR-MC-RD-NN</td></tr> </tbody> </table>	Cable retention*		A	None	B	NVX-CR-MC-FT-NN	C	NVX-CR-MC-RD-NN	D	NVX-CR-SA-SM-NN	E	NVX-CR-TI-SM-NN	F	NVX-CR-DU-FL-NN	G	4xNVX-CR-MC-FT-NN	H	4xNVX-CR-MC-RD-NN	I	4xNVX-CR-SA-SM-NN	J	4xNVX-CR-TI-SM-NN	K	4xNVX-CR-DU-FL-NN	L	2xNVX-CR-MC-FT-NN and 2xNVX-CR-MC-RD-NN	<table border="1"> <thead> <tr> <th colspan="2">Cable Termination Unit (CTU) options</th> </tr> </thead> <tbody> <tr> <td> <table border="1"> <thead> <tr><th>B</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-MC-FT-NN</b>                      • Flat cable                      • Metal clip                      • Range 3 x 5 to 4 x 8 mm                 </td> </tr> </tbody> </table> </td> <td> <table border="1"> <thead> <tr><th>C</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-MC-RD-NN</b>                      • Round cable                      • Metal clip                      • Range 4 to 6.2 mm                 </td> </tr> </tbody> </table> </td> <td> <table border="1"> <thead> <tr><th>D</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-SA-SM-NN</b>                      • Round cable                      • Dia up to 8 mm                      • Strength member                      • Aramide yarns                      • Single layer                 </td> </tr> </tbody> </table> </td> <td> <table border="1"> <thead> <tr><th>E</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-TI-SM-NN</b>                      • Round cable                      • Dia up to 8 mm                      • Aramide yarns                      • Single layer                 </td> </tr> </tbody> </table> </td> <td> <table border="1"> <thead> <tr><th>F</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-DU-FL-NN</b>                      • Round cable                      • Dia up to 6.2 mm                      • Aramide yarns                      • Dual layer                      • Compact length                 </td> </tr> </tbody> </table> </td> </tr> </tbody> </table>	Cable Termination Unit (CTU) options		<table border="1"> <thead> <tr><th>B</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-MC-FT-NN</b>                      • Flat cable                      • Metal clip                      • Range 3 x 5 to 4 x 8 mm                 </td> </tr> </tbody> </table>	B		<b>NVX-CR-MC-FT-NN</b> • Flat cable • Metal clip • Range 3 x 5 to 4 x 8 mm	<table border="1"> <thead> <tr><th>C</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-MC-RD-NN</b>                      • Round cable                      • Metal clip                      • Range 4 to 6.2 mm                 </td> </tr> </tbody> </table>	C		<b>NVX-CR-MC-RD-NN</b> • Round cable • Metal clip • Range 4 to 6.2 mm	<table border="1"> <thead> <tr><th>D</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-SA-SM-NN</b>                      • Round cable                      • Dia up to 8 mm                      • Strength member                      • Aramide yarns                      • Single layer                 </td> </tr> </tbody> </table>	D		<b>NVX-CR-SA-SM-NN</b> • Round cable • Dia up to 8 mm • Strength member • Aramide yarns • Single layer	<table border="1"> <thead> <tr><th>E</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-TI-SM-NN</b>                      • Round cable                      • Dia up to 8 mm                      • Aramide yarns                      • Single layer                 </td> </tr> </tbody> </table>	E		<b>NVX-CR-TI-SM-NN</b> • Round cable • Dia up to 8 mm • Aramide yarns • Single layer	<table border="1"> <thead> <tr><th>F</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-DU-FL-NN</b>                      • Round cable                      • Dia up to 6.2 mm                      • Aramide yarns                      • Dual layer                      • Compact length                 </td> </tr> </tbody> </table>	F		<b>NVX-CR-DU-FL-NN</b> • Round cable • Dia up to 6.2 mm • Aramide yarns • Dual layer • Compact length
Cable retention*																																																	
A	None																																																
B	NVX-CR-MC-FT-NN																																																
C	NVX-CR-MC-RD-NN																																																
D	NVX-CR-SA-SM-NN																																																
E	NVX-CR-TI-SM-NN																																																
F	NVX-CR-DU-FL-NN																																																
G	4xNVX-CR-MC-FT-NN																																																
H	4xNVX-CR-MC-RD-NN																																																
I	4xNVX-CR-SA-SM-NN																																																
J	4xNVX-CR-TI-SM-NN																																																
K	4xNVX-CR-DU-FL-NN																																																
L	2xNVX-CR-MC-FT-NN and 2xNVX-CR-MC-RD-NN																																																
Cable Termination Unit (CTU) options																																																	
<table border="1"> <thead> <tr><th>B</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-MC-FT-NN</b>                      • Flat cable                      • Metal clip                      • Range 3 x 5 to 4 x 8 mm                 </td> </tr> </tbody> </table>	B		<b>NVX-CR-MC-FT-NN</b> • Flat cable • Metal clip • Range 3 x 5 to 4 x 8 mm	<table border="1"> <thead> <tr><th>C</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-MC-RD-NN</b>                      • Round cable                      • Metal clip                      • Range 4 to 6.2 mm                 </td> </tr> </tbody> </table>	C		<b>NVX-CR-MC-RD-NN</b> • Round cable • Metal clip • Range 4 to 6.2 mm	<table border="1"> <thead> <tr><th>D</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-SA-SM-NN</b>                      • Round cable                      • Dia up to 8 mm                      • Strength member                      • Aramide yarns                      • Single layer                 </td> </tr> </tbody> </table>	D		<b>NVX-CR-SA-SM-NN</b> • Round cable • Dia up to 8 mm • Strength member • Aramide yarns • Single layer	<table border="1"> <thead> <tr><th>E</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-TI-SM-NN</b>                      • Round cable                      • Dia up to 8 mm                      • Aramide yarns                      • Single layer                 </td> </tr> </tbody> </table>	E		<b>NVX-CR-TI-SM-NN</b> • Round cable • Dia up to 8 mm • Aramide yarns • Single layer	<table border="1"> <thead> <tr><th>F</th></tr> </thead> <tbody> <tr> <td></td> <td> <b>NVX-CR-DU-FL-NN</b>                      • Round cable                      • Dia up to 6.2 mm                      • Aramide yarns                      • Dual layer                      • Compact length                 </td> </tr> </tbody> </table>	F		<b>NVX-CR-DU-FL-NN</b> • Round cable • Dia up to 6.2 mm • Aramide yarns • Dual layer • Compact length																														
B																																																	
	<b>NVX-CR-MC-FT-NN</b> • Flat cable • Metal clip • Range 3 x 5 to 4 x 8 mm																																																
C																																																	
	<b>NVX-CR-MC-RD-NN</b> • Round cable • Metal clip • Range 4 to 6.2 mm																																																
D																																																	
	<b>NVX-CR-SA-SM-NN</b> • Round cable • Dia up to 8 mm • Strength member • Aramide yarns • Single layer																																																
E																																																	
	<b>NVX-CR-TI-SM-NN</b> • Round cable • Dia up to 8 mm • Aramide yarns • Single layer																																																
F																																																	
	<b>NVX-CR-DU-FL-NN</b> • Round cable • Dia up to 6.2 mm • Aramide yarns • Dual layer • Compact length																																																

# SRC3-U5A1B1BG000

---

## Material Specifications

**Material Type** Impact-resistant polymer

## Optical Specifications

**Fiber Type** G.652.D | G.657.A1 | G.657.A2 | G.657.B3

## Environmental Specifications

**Operating Temperature** -40 °C to +70 °C (-40 °F to +158 °F)

**Environmental Space** Above ground | Below ground | Direct burial

**Qualification Standards** IEC 60529, IP68 + 2 m waterhead | IEC 61753-1, category G

**UV Resistance** UV stabilized

**Water Resistance** Flash test valve at 2 psi (20 kPa)

## Packaging and Weights

**Packaging quantity** 10

**Packaging Type** Box | Carton

## Included Products

NVX-CR-MC-FT-NN – NOVUX™ Cable Termination Unit (CTU) for flat cables with 3x5 to 4x8 mm diameter, metal clip

# NVX-CR-MC-FT-NN

---



NOVUX™ Cable Termination Unit (CTU) for flat cables with 3x5 to 4x8 mm diameter, metal clip

## Product Classification

<b>Regional Availability</b>	Asia   EMEA   Latin America   North America
<b>Product Type</b>	Cable termination kit
<b>Product Brand</b>	NOVUX™
<b>Product Series</b>	CSC

## General Specifications

<b>Application</b>	For use with CSC Fiber closures
<b>Color</b>	Black

## Packaging and Weights

<b>Packaging quantity</b>	20
<b>Packaging Type</b>	Bag   Box

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="https://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant

