


U4GLULUT8

Base Product

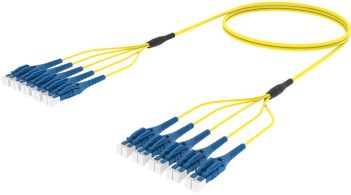

Singlemode LC/UPC Uniboot to LC/UPC Uniboot Ruggedized fanout Cable, 8-Fiber, Dual Rated LSZH/Riser, 8 fiber PmP 2.0 mm /Cca

Product Classification

Regional Availability	Europe
Portfolio	CommScope®
Product Type	Ruggedized fanout
Product Brand	Propel SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications

Connector A, quantity	4
Color, boot A	Blue
Color, connector A	Green
Connector B, quantity	4
Color, boot B	Blue
Color, connector B	Blue
Construction Type	Stranded
Furcation Color	Yellow
Interface, Connector A	LC/UPC
Interface Feature, connector A	Uniboot
Interface, Connector B	LC/UPC
Interface Feature, connector B	Uniboot
Jacket Color	Yellow
Polarity	Method B Enhanced (ULL)
Fibers per Subunit, quantity	8
Total Fibers, quantity	8


U4GLULUT8

Dimensions

Cable Assembly Length Range (m) 3 – 999

Cable Assembly Length Range (ft) 8 – 999

Ordering Tree

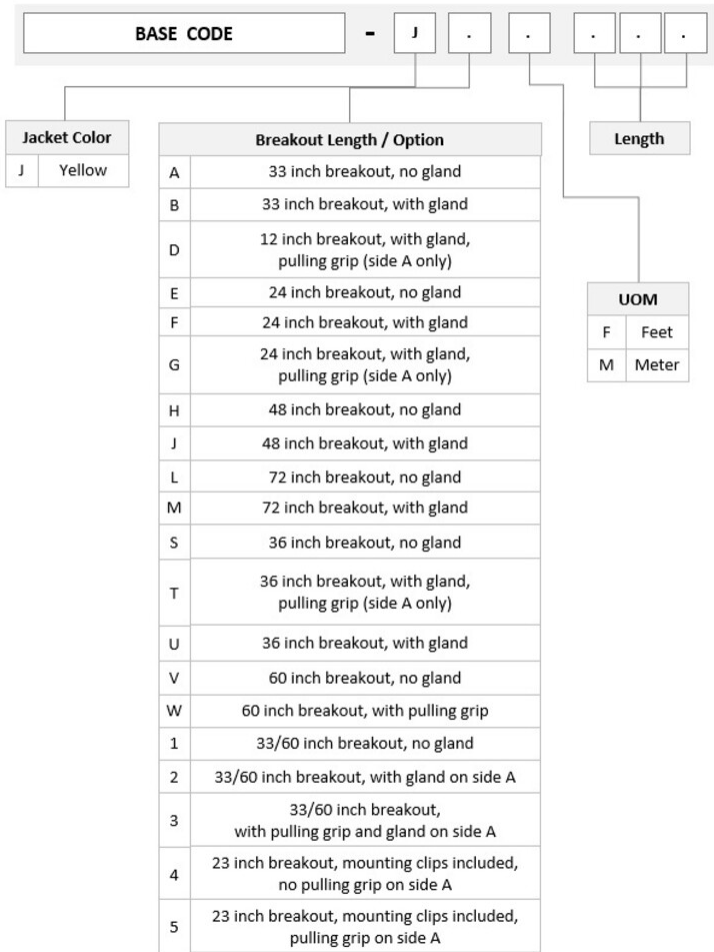

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.657.A2, TeraSPEED®

U4GLULUT8

Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
EN50575 CPR Cable EuroClass Fire Performance	B2ca
Environmental Space	Dual Rated LSZH/Riser Indoor


Regulatory Compliance/Certifications

Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



Included Products

760254313	-	Fiber indoor cable, Low Smoke Zero Halogen Riser MPO Trunk with 2.0 mm Subunits, 8 fiber,
N-008-MP-8G1-F08YL/20T/B2	-	Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color, B2ca flame rating
860658160	-	LC/UPC Uniboot Connector, Singlemode, Blue

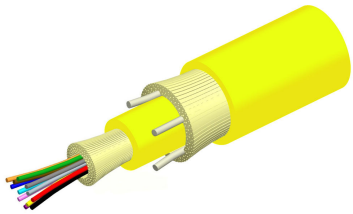

Fiber indoor cable, Low Smoke Zero Halogen Riser MPO Trunk with 2.0 mm Subunits, 8 fiber, Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color, B2ca flame rating

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-MP

General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Yellow
Jacket Marking	Feet
Subunit, quantity	1
Total Fiber Count	8

Dimensions

Buffer Tube/Subunit Diameter	2 mm 0.079 in
Diameter Over Jacket	5.3 mm 0.209 in

Mechanical Specifications

Minimum Bend Radius, loaded	80 mm 3.15 in
Minimum Bend Radius, unloaded	53 mm 2.087 in
Tensile Load, long term, maximum	133 N 29.9 lbf
Tensile Load, short term, maximum	445 N 100.04 lbf
Compression	10 N/mm 57.101 lb/in

760254313 | N-008-MP-8G1-F08YL/20T/B2

Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	2.94 N-m 26.021 in lb
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7
Vertical Rise, maximum	412 m 1,351.706 ft

Optical Specifications

Fiber Type	G.657.A2/B2
-------------------	-------------

Environmental Specifications

Installation temperature	0 °C to +60 °C (+32 °F to +140 °F)
Operating Temperature	0 °C to +70 °C (+32 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596 Telcordia GR-409
EN50575 CPR Cable EuroClass Fire Performance	B2ca
EN50575 CPR Cable EuroClass Smoke Rating	s1a
EN50575 CPR Cable EuroClass Droplets Rating	d0
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Low Smoke Zero Halogen (LSZH)
Flame Test Method	IEC 60332-3 IEC 60754-2 IEC 61034-2

Environmental Test Specifications

Low High Bend	0 °C to +70 °C (+32 °F to +158 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	0 °C to +70 °C (+32 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Packaging and Weights

760254313 | N-008-MP-8G1-F08YL/20T/B2

Cable weight

33 kg/km | 22.175 lb/kft

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

860658160



LC/UPC Uniboot Connector, Singlemode, Blue

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber connector

General Specifications

Color, boot	Blue
Color, housing	Blue
Interface	LC/UPC

Dimensions

Length	64 mm 2.52 in
Compatible Cable Diameter	1.6 mm 0.063 in 2 mm 0.079 in

Material Specifications

Ferrule Material	Zirconia
-------------------------	----------

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °
--	----------------

Optical Specifications

Fiber Mode	Singlemode
Insertion Loss Change, mating	0.2 dB
Optical Components Standard	ANSI/TIA-568. 3-D IEC 61753-1
Insertion Loss Change, temperature	0.2 dB
Insertion Loss, ULL, maximum	0.25 dB
Return Loss, minimum	55 dB

Regulatory Compliance/Certifications

860658160

Agency

CHINA-ROHS

ROHS

UK-ROHS

Classification

Above maximum concentration value

Compliant/Exempted

Compliant/Exempted

*** Footnotes****Insertion Loss Change, mating**

TIA-568: Maximum insertion loss change after 500 matings

Insertion Loss Change, temperature

Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F)